
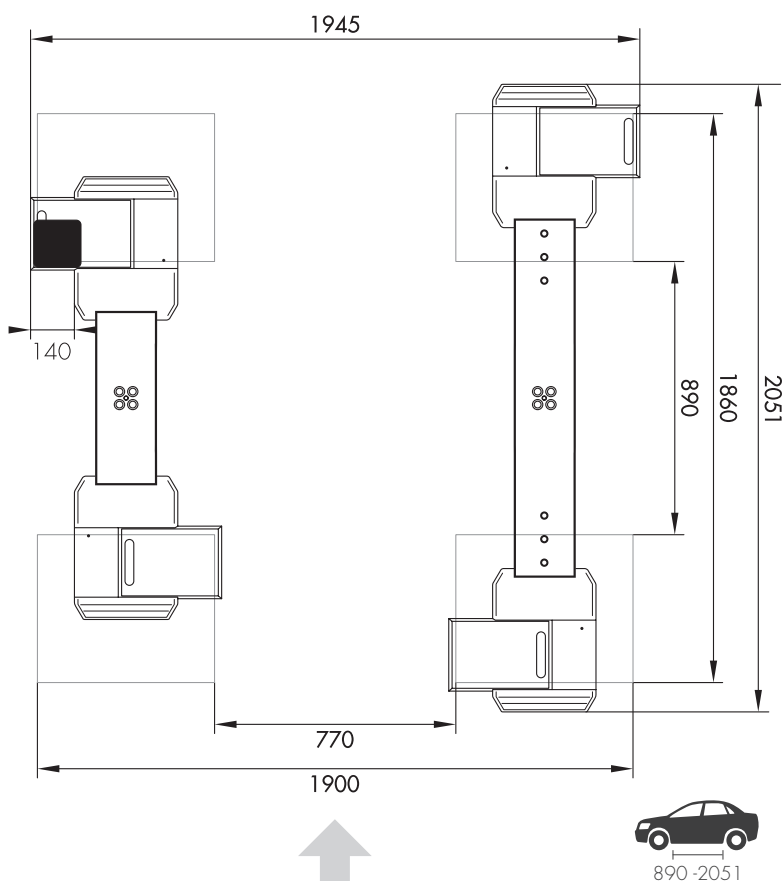



Uni Lift 2.35 plus

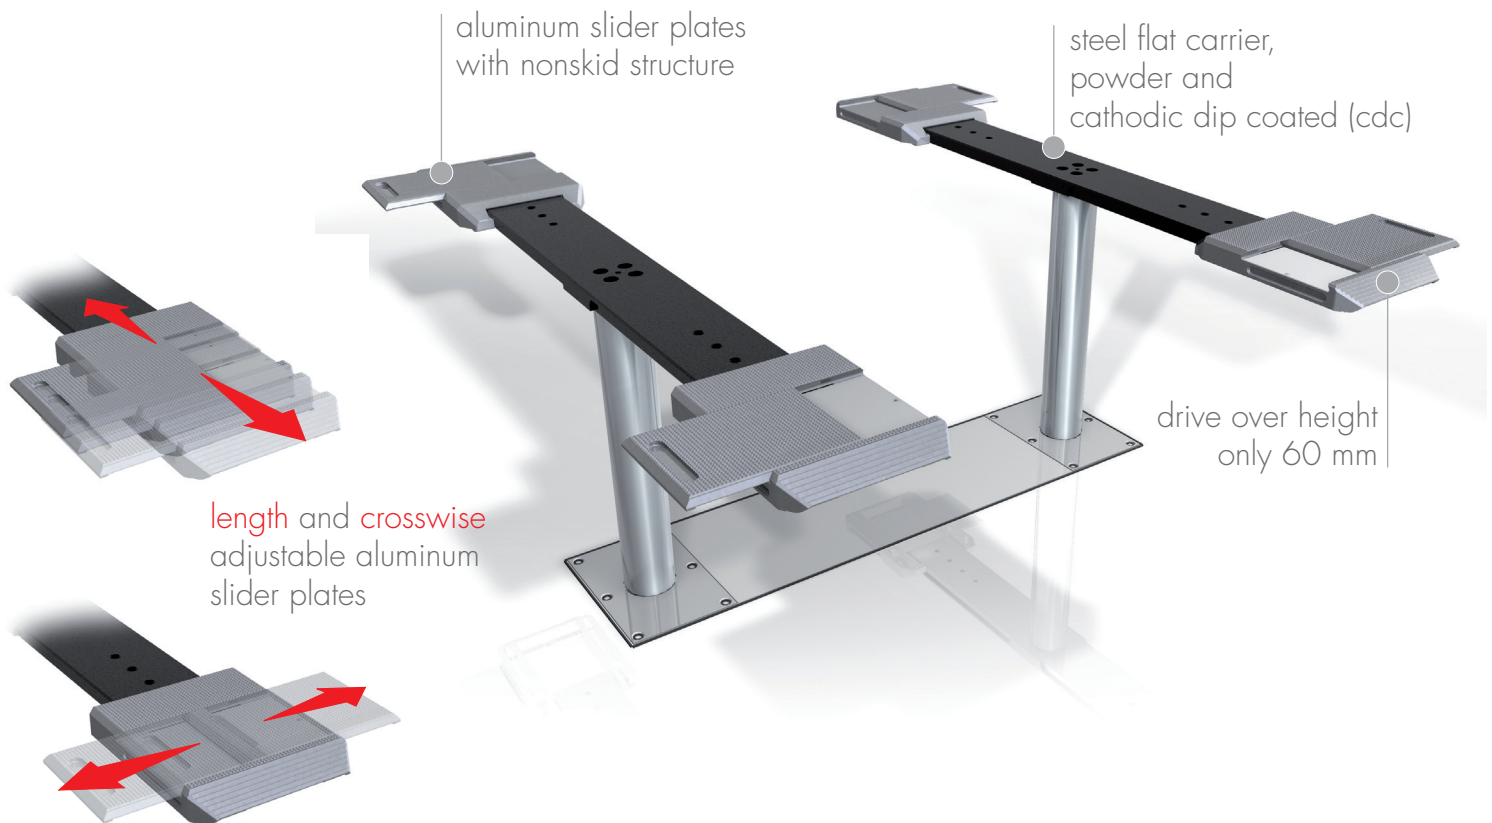

TECHNICAL DATA


capacity	3500 kg
lifting height	1860 mm
effective raise height	1920 mm
drive over height	60 mm
piston diameter	123 mm
piston distance	1335 mm
installation depth	2338 mm
motor output	3,0 kW
power connector	400 V/16 A
cable length to control	8 m
lifting time	≈ 35 sec.
lowering time	≈ 35 sec.

Support Uni 2.35 plus	102640
Installation cassette STEEL 1335 mm	2010XX
Installation cassette STEEL 1335 mm galvanized	2011XX
Lifting unit oil 3,5 l 1335 mm - K	104881
pre-assembled in installation cassette	
Lifting unit oil 3,5 l 1335 mm - H	104882
packed in wooden box	

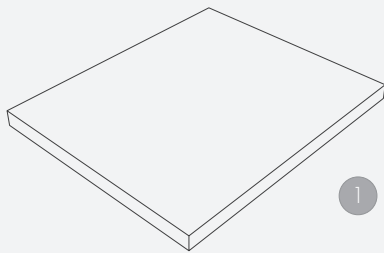


1

- 1 Rubber pad
290 x 335 x 20 mm
102275 (1set / 4 pcs.)




2

- 2 Rubber pad
120 x 120 x 40 mm
102274 (1set / 4 pcs.)




3

- 3 Rubber pad pyramid
70 mm
102273 (1set / 4 pcs.)




4

- 4 Rubber pad pyramid
140 mm
102291 (1set / 4 pcs.)




1

- 1 Stacking adapter
d130 x d 45 / 25-55 mm
102285 (1set / 4 pcs.)




2

- 2 Stacking adapter NCV3 Dorn
d 45 x d 70 / 125-250 mm
102290 (1set / 2 pcs.)



3

- 3 Stacking adapter V-prism
d 45 / 182-312 mm
102289 (1set / 2 pcs.)




4

- 4 Stacking adapter U-form
d 130 x d 45 / 193-295 mm
102288 (1set / 4 pcs.)



5

- 5 Stacking adapter extension
80 mm
102284 (1set / 4 pcs.)



6

- 6 Stacking adapter extension
130 mm
102287 (1set / 4 pcs.)

Herrmann AG
Bahnhofstrasse 32
D-93483 Pöding

Sales

Phone: +49 (0)9461/91388 50
Fax: +49 (0)9461/91388 55
E-Mail: sales@herrmann.de

Service

Phone: +49 (0)9461/91388 30
Fax: +49 (0)9461/91388 33
E-Mail: service@herrmann.de

www.herrmann.de