
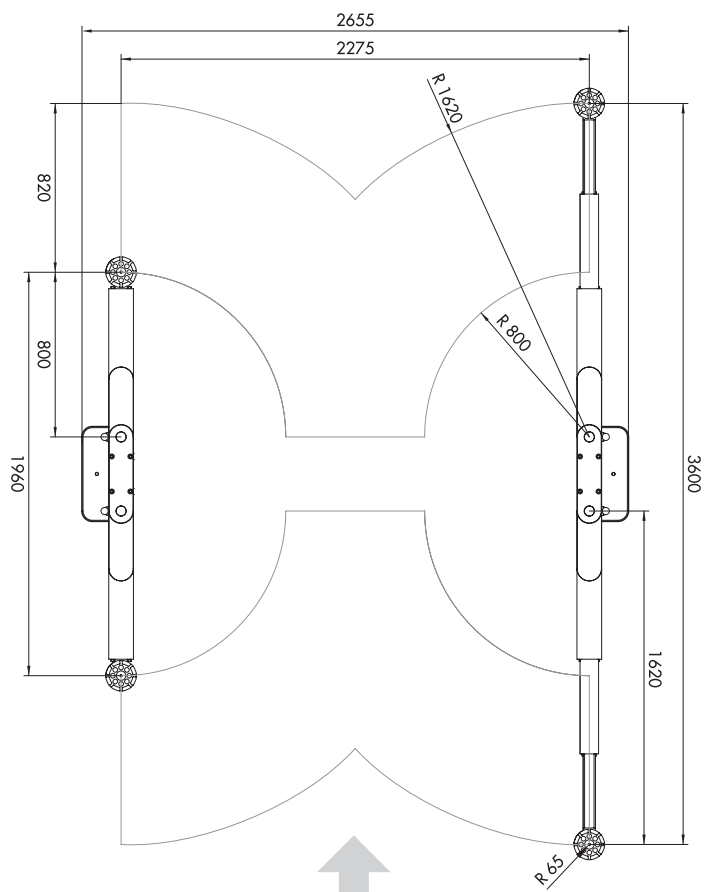


SCHWENKARM_{LIFT}

2.50

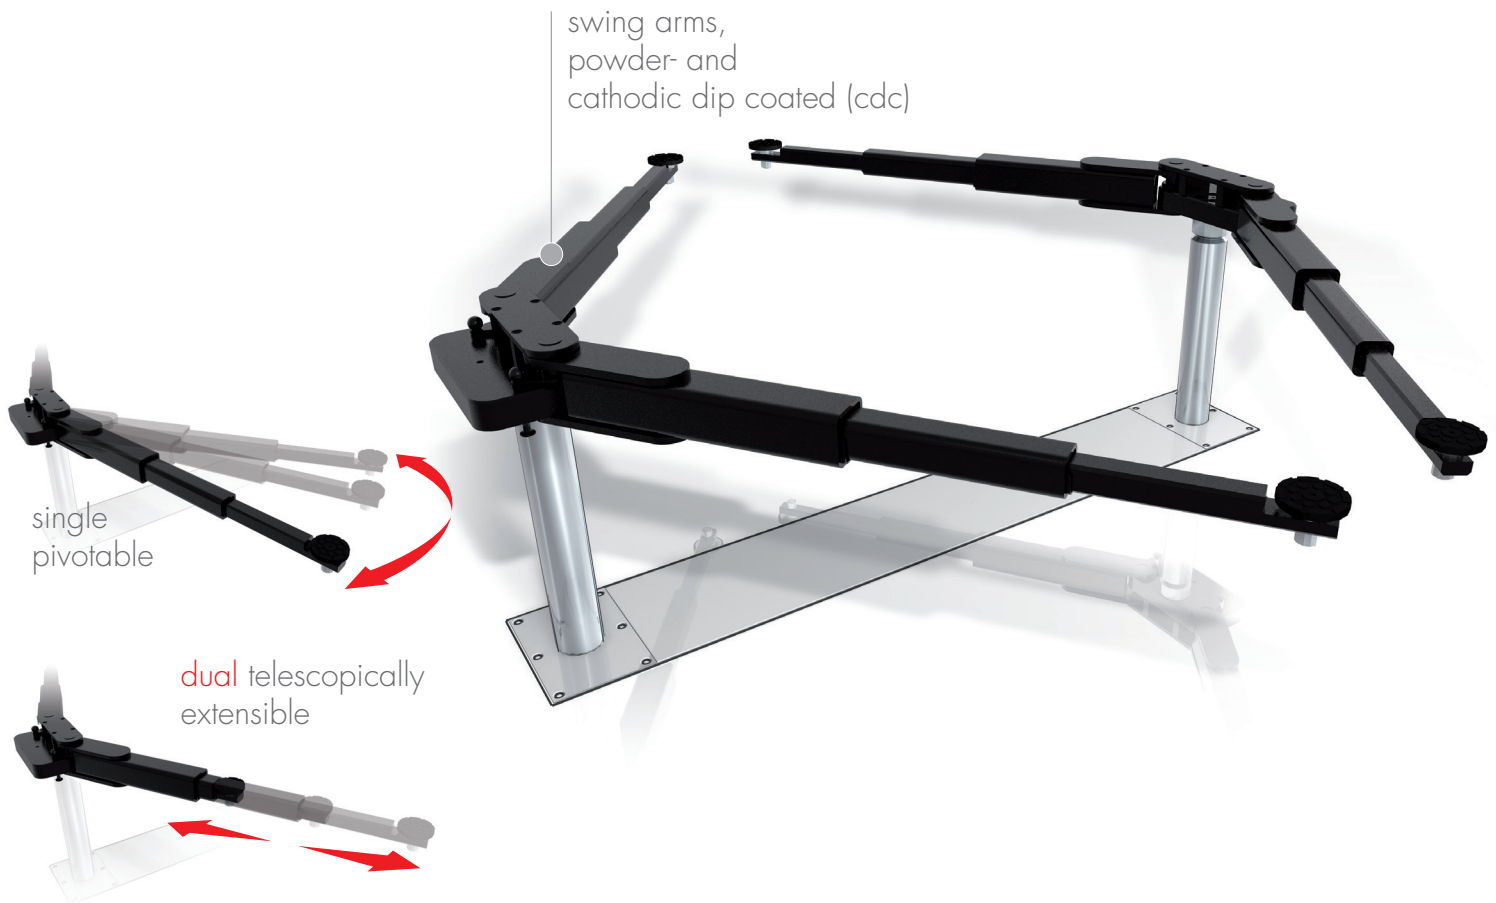


TECHNICAL DATA

load capacity	5000 kg
lifting height	1780 mm
effective raise height	1894 mm
move in height	110 mm
piston diameter	123 mm
piston distance	2285 mm
installation depth	2338 mm
motor output	3,0 kW
power connector	400 V/16 A
cable length to control	8 m
lifting time	45 sec.
lowering time	45 sec.

pre-assembled with cassette
cassette
without cassette (delivery in wooden case)
basic unit (incl. cassette without support)
support


TOP10023
TOP11001
TOP10123
TOP20140
TOP20884

ACCESSORIES

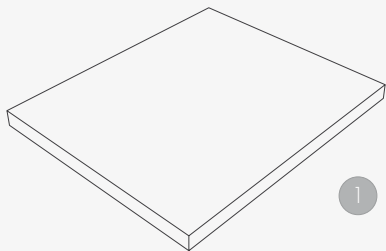


1

- 1 | rubber pad
290 x 335 x 20 mm
TOP11007 (1 set / 4 pcs.)




2

- 2 | rubber pad
120 x 120 x 40 mm
TOP11006 (1 set / 4 pcs.)




3

- 3 | rubber pad pyramid
70 mm
TOP11005 (1 set / 4 pcs.)




4

- 4 | rubber pad pyramid
140 mm
TOP11035 (1 set / 4 pcs.)




1

- 1 | stacking adapter
d130 x d 45 / 25-55 mm
TOP11021 (1 set / 4 pcs.)




2

- 2 | stacking adapter NCV3
d 45 x d 70 / 125-250 mm
TOP11031 (1 set / 2 pcs.)




3

- 3 | stacking adapter prism
d 45 / 182-312 mm
TOP11026 (1 set / 2 pcs.)



4

- 4 | stacking adapter U-form
d 130 x d 45 / 193-295 mm
TOP11025 (1 set / 4 pcs.)



5

- 5 | stacking adapter extension
80 mm
TOP11020 (1 set / 4 pcs.)



6

- 6 | stacking adapter extension
130 mm
TOP11023 (1 set / 4 pcs.)

Herrmann AG

Bahnhofstrasse 32

D-93483 Pöding

Sales

Phone: +49 (0)9461/91388 50

Fax: +49 (0)9461/91388 55

E-Mail: sales@herrmann.de

Service

Phone: +49 (0)9461/91388 30

Fax: +49 (0)9461/91388 33

E-Mail: service@herrmann.de

www.herrmann.de