



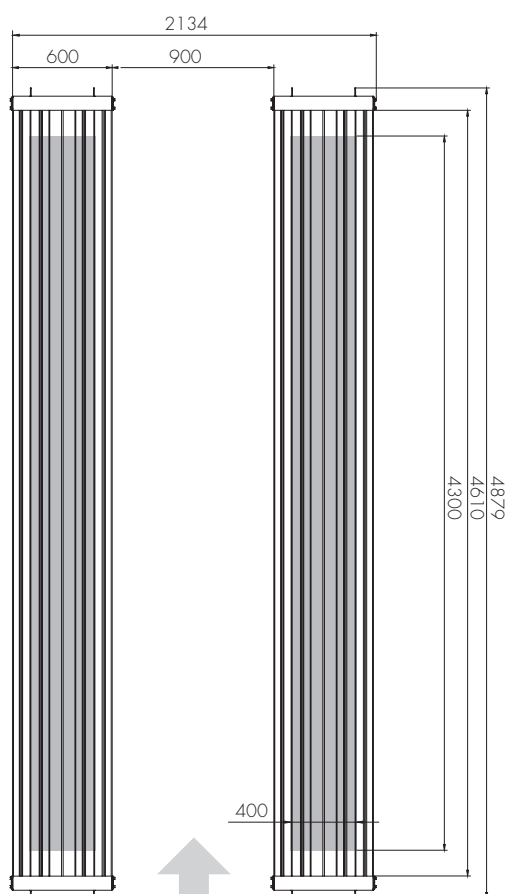

# Alu Track Lift 4.40

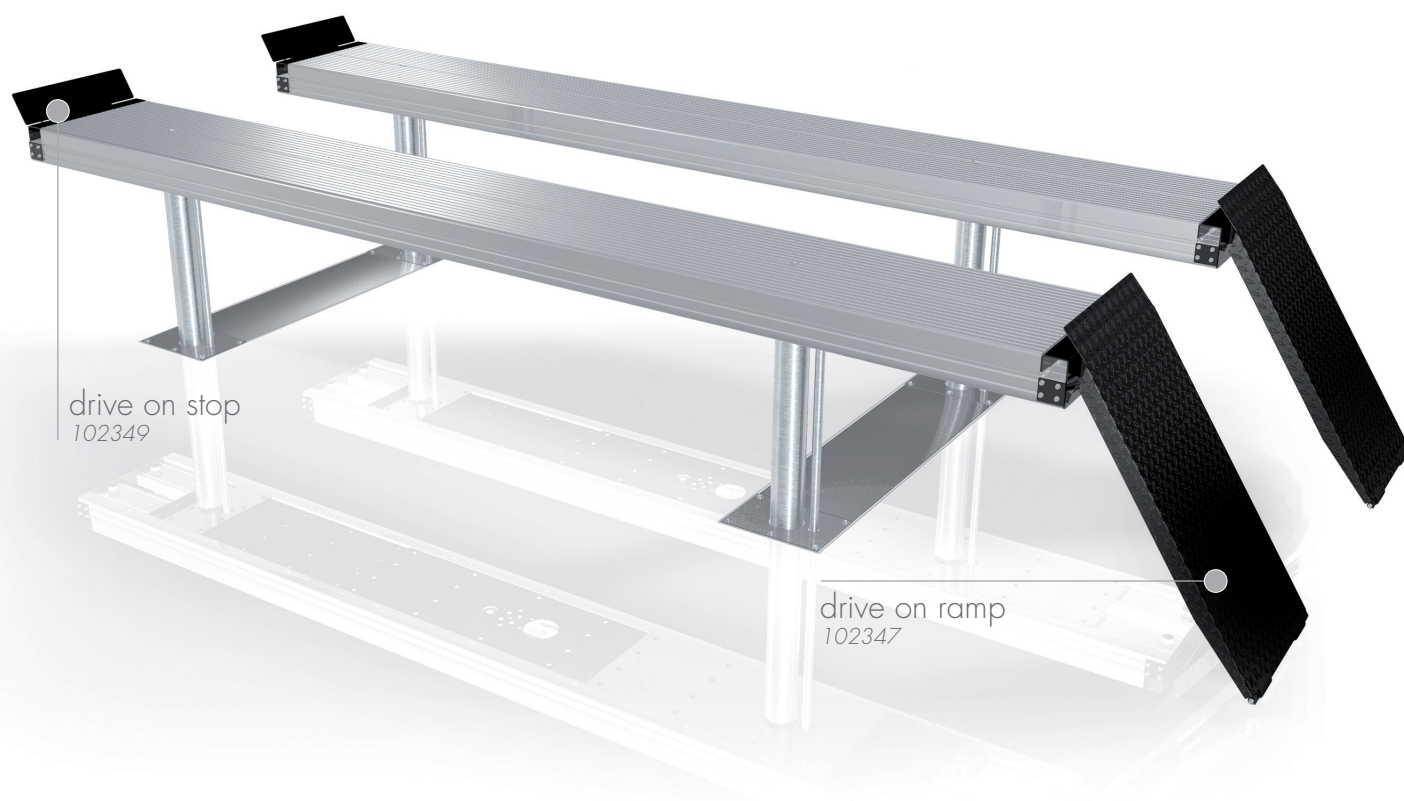


## TECHNICAL DATA

|                         |            |
|-------------------------|------------|
| capacity                | 4000 kg    |
| lifting height          | 1860 mm    |
| effective raise height  | 2020 mm    |
| platform length         | 4800 mm    |
| platform height         | 180 mm     |
| piston diameter         | 123 mm     |
| piston distance         | 1500 mm    |
| installation depth      | 2498 mm    |
| motor output            | 3,0 kW     |
| power connector         | 400 V/16 A |
| cable length to control | 8 m        |
| lifting time            | ≈ 35 sec.  |
| lowering time           | ≈ 35 sec.  |


|                                                 |        |
|-------------------------------------------------|--------|
| Platform support Alu Track 4.40                 | 104982 |
| Installation cassettes STEEL 1500 mm            | 2110XX |
| Installation cassettes STEEL 1500 mm galvanized | 2111XX |
| Lifting unit oil 4,0 t 1500 mm - K              | 104966 |
| pre-assembled in installation cassette          |        |
| Lifting unit oil 4,0 t 1500 mm - H              | 104967 |
| packed in wooden box                            |        |

# Accessories

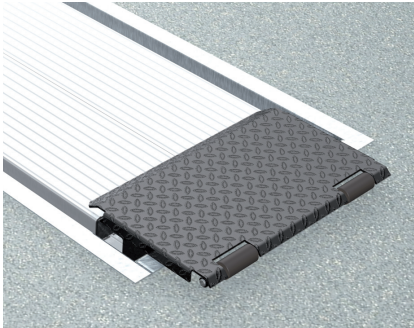


## Drive on ramp

for installation flush with floor level  
102346

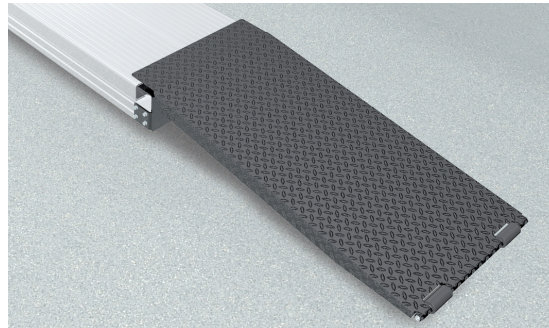


## Drive on ramp

for floor incumbent installation  
1250 mm, hanging, bevel 7°  
102347

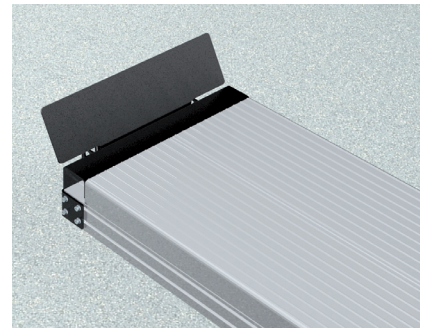


## Drive on stop

102349

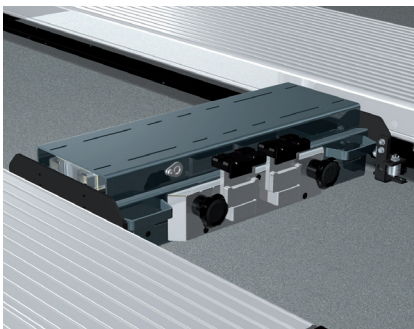


## Axle lifter

2600 kg, pneumatic, without slide rails  
105063

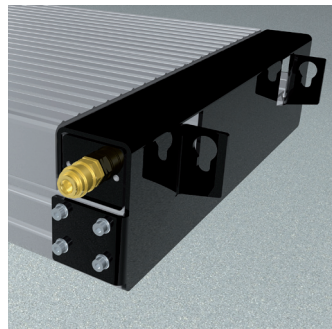

## Compressed air supply

for floor incumbent installation  
or rectangular foundation  
102407

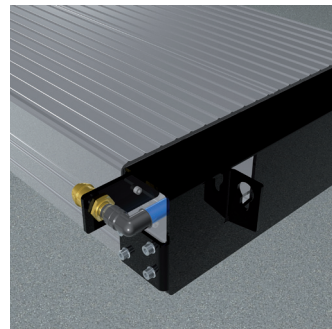

## Compressed air supply

for installation flush with  
floor level in H-frame  
105617




## Slide rail set

4400 mm  
102374  
4800mm  
102375



## Wheel alignment supports

1350 mm  
102377  
600 mm  
102381

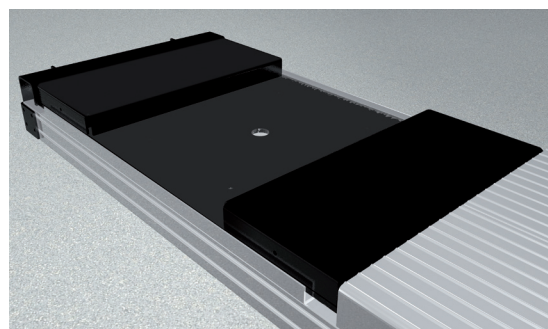


## Platform support with platform notches for turn tables and for sliding plates incl. levelling plates

Support Alu Track 2.35  
1200 mm / 1200 mm  
105238

Support Alu Track 2.50  
1400 mm / 1400 mm  
105266

Support Alu Track 2.35 Duplo  
1200 mm / 1200 mm  
105244


Support Alu Track 2.50 Duplo  
1400 mm / 1400 mm  
105259

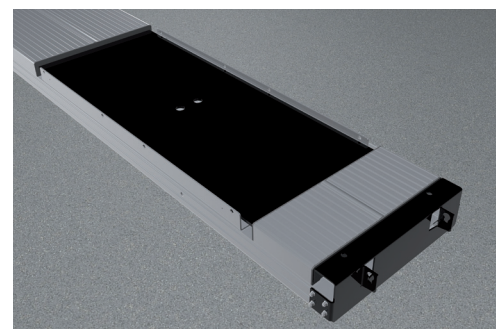

Support Alu Track 4.40  
1400 mm / 1400 mm  
105269


Support Alu Track 4.65  
1000 mm / 2x1400 mm  
105272

# Accessories

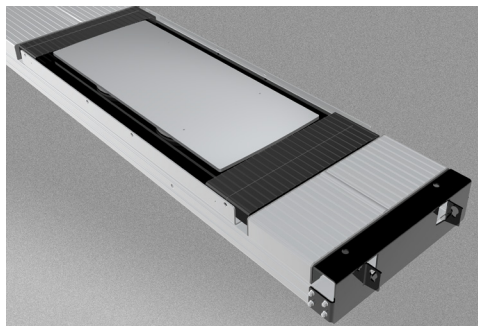

Sliding plate  
Standard

1050 mm  
102426

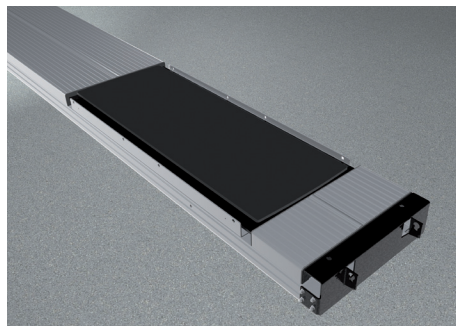


Sliding plate  
Precision

1200 mm      1400 mm  
102423      102424




Illumination set LED  
Alu Track

102394

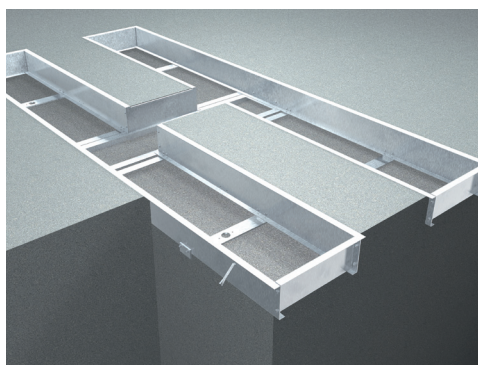


Surround frame 2-piston  
for installation flush with floor level

4400 mm  
102356  
4800 mm  
102361

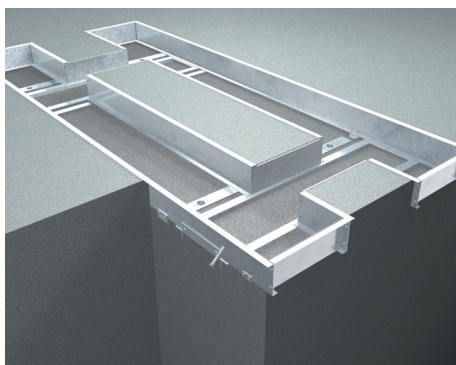


Surround frame 4-piston  
for installation flush with floor level

4400 mm  
105177  
5500 mm  
102387

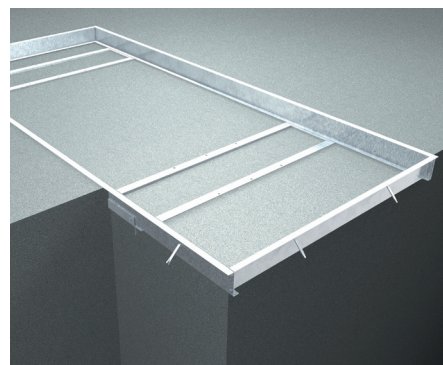


Surround frame rectangle  
for installation flush with floor level

2-piston 4400 mm      4-piston 4800 mm  
105335      106108  
2-piston 4800 mm      4-piston 5500 mm  
106187      106137

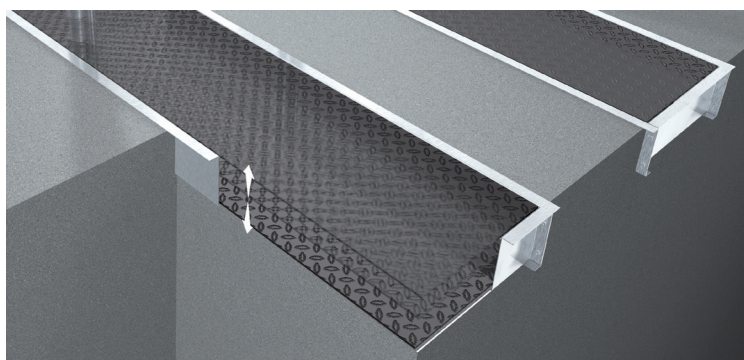

Automatic floor levelling system

|                            |                                  |                            |
|----------------------------|----------------------------------|----------------------------|
| 2-piston 4400 mm<br>102366 | 2-piston DUPLO 4400 mm<br>102363 | 4-piston 4800 mm<br>105178 |
| 2-piston 4800 mm<br>102428 | 2-piston DUPLO 4800 mm<br>102365 | 4-piston 5500 mm<br>102392 |

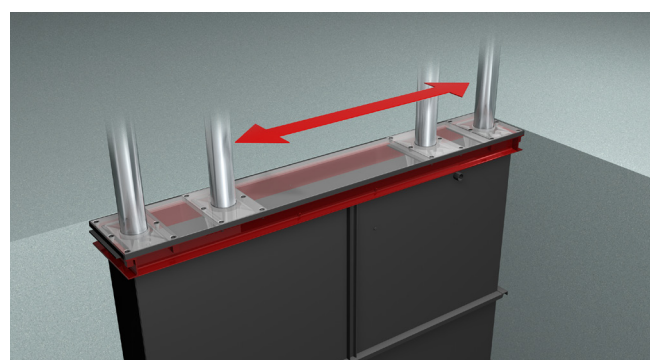

Future Proof installation cassette

Steel 2285 mm, drilling patterns 2285/1785/1335  
2150XX

Steel galvanized 2285 mm, 2285/1785/1335  
2151XX

**Herrmann AG**  
Bahnhofstrasse 32  
D-93483 Pöding

**Sales**

Phone: +49 (0)9461/91388 50  
Fax: +49 (0)9461/91388 55  
E-Mail: [sales@herrmann.de](mailto:sales@herrmann.de)

**Service**

Phone: +49 (0)9461/91388 30  
Fax: +49 (0)9461/91388 33  
E-Mail: [service@herrmann.de](mailto:service@herrmann.de)

[www.herrmann.de](http://www.herrmann.de)