
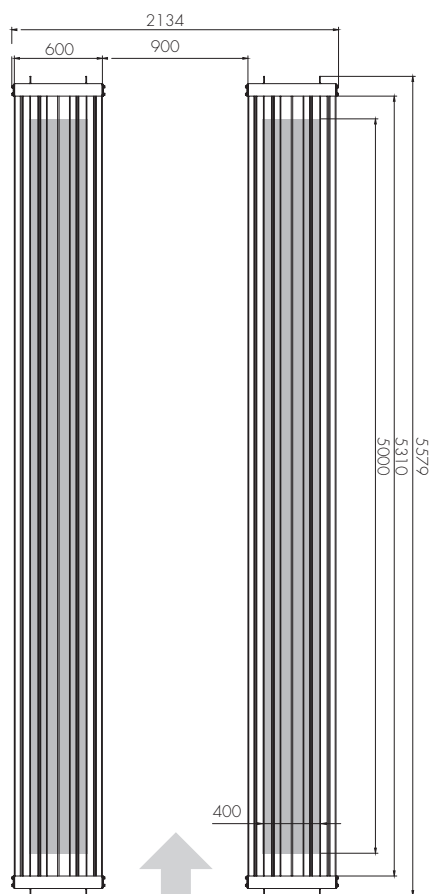


Alu Track Lift 4.65

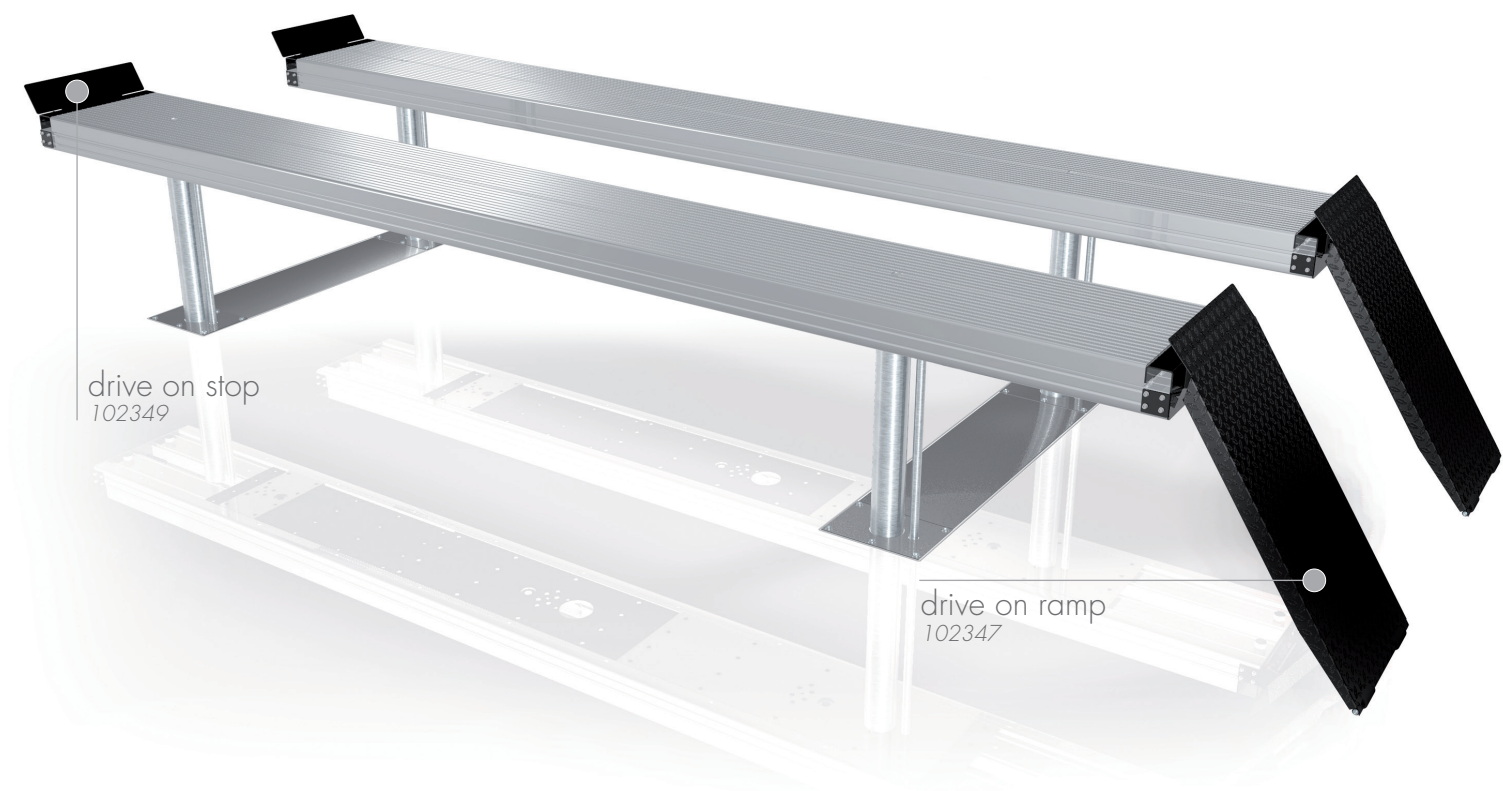


TECHNICAL DATA

capacity	6500 kg
lifting height	1860 mm
effective raise height	2020 mm
platform length	5500 mm
platform height	180 mm
piston diameter	123 mm
piston distance	1500 mm
installation depth	2498 mm
motor output	3,0 kW
power connector	400 V/16 A
cable length to control	8 m
lifting time	≈ 35 sec.
lowering time	≈ 35 sec.


Platform support Alu Track 6.50	105170
Installation cassettes STEEL 1500 mm	2110XX
Installation cassettes STEEL 1500 mm galvanized	2111XX
Lifting unit oil 6,5 t 1500 mm - K pre-assembled in installation cassette	104968
Lifting unit oil 6,5 t 1500 mm - H packed in wooden box	104969

Accessories

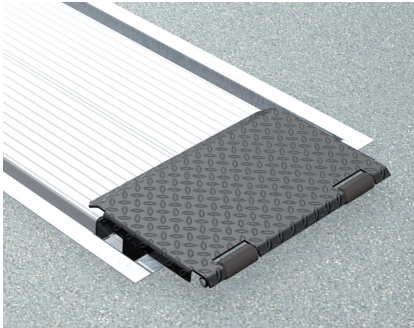


Drive on ramp

for installation flush with floor level
102346

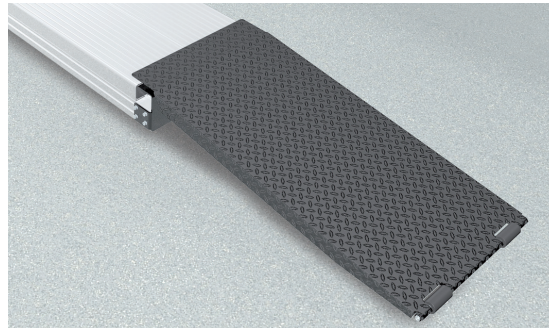


Drive on ramp

for floor incumbent installation
1250 mm, hanging, bevel 7°
102347

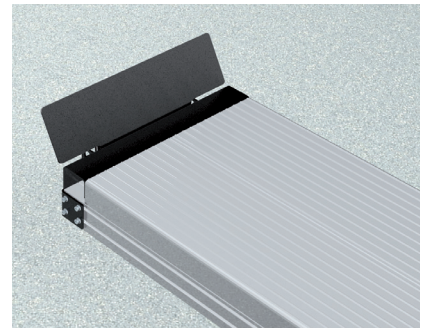


Drive on stop

102349

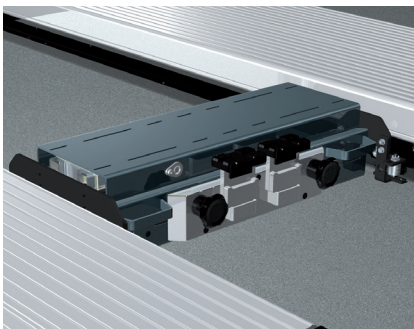


Axle lifter

2600 kg, pneumatic, without slide rails
105063



Compressed air supply

for floor incumbent installation
or rectangular foundation
102407



Compressed air supply

for installation flush with
floor level in H-frame
105617




Slide rail set

4400 mm
102374
4800mm
102375



Wheel alignment supports

1350 mm
102377
600 mm
102381

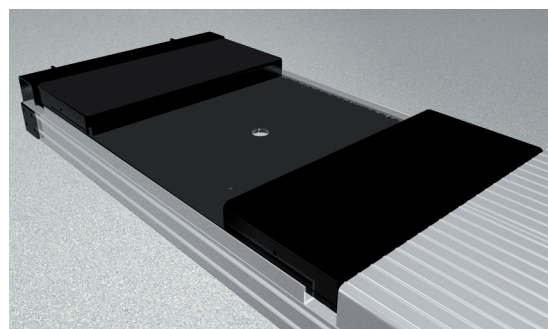


Platform support with platform notches for turn tables and for sliding plates incl. levelling plates

Support Alu Track 2.35
1200 mm / 1200 mm
105238

Support Alu Track 2.50
1400 mm / 1400 mm
105266

Support Alu Track 2.35 Duplo
1200 mm / 1200 mm
105244


Support Alu Track 2.50 Duplo
1400 mm / 1400 mm
105259

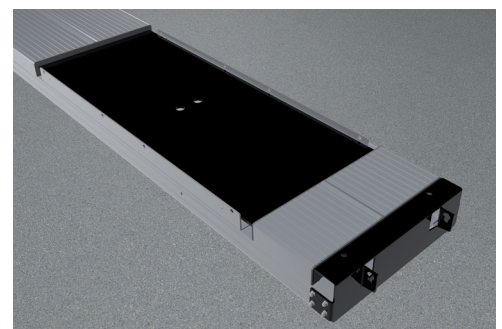

Support Alu Track 4.40
1400 mm / 1400 mm
105269


Support Alu Track 4.65
1000 mm / 2x1400 mm
105272

Accessories

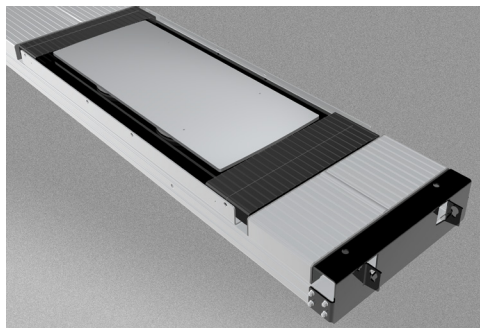


Sliding plate
Standard

1050 mm
102426

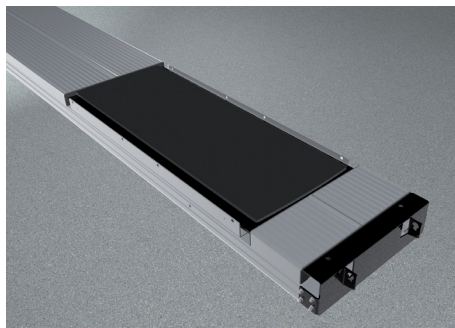


Sliding plate
Precision

1200 mm 1400 mm
102423 102424

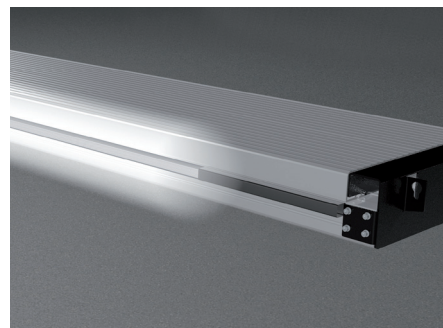


Illumination set LED
Alu Track

102394

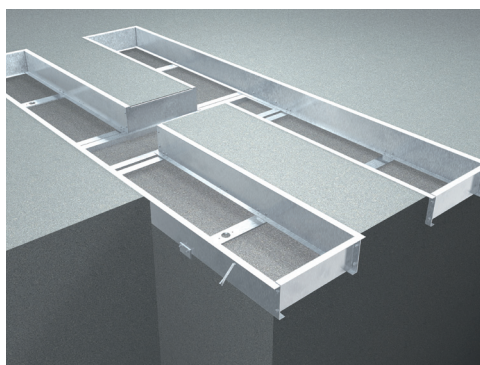


Surround frame 2-piston
for installation flush with floor level

4400 mm
102356
4800 mm
102361

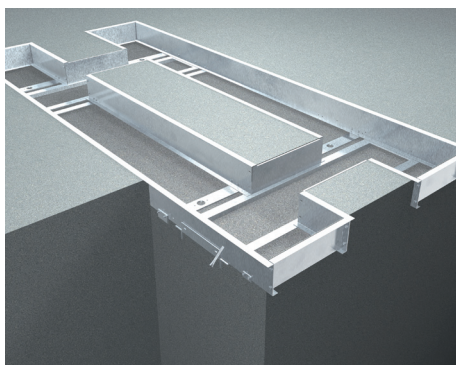


Surround frame 4-piston
for installation flush with floor level

4400 mm
105177
5500 mm
102387

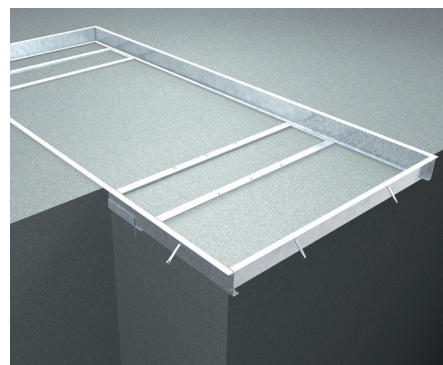


Surround frame rectangle
for installation flush with floor level

2-piston 4400 mm 4-piston 4800 mm
105335 106108
2-piston 4800 mm 4-piston 5500 mm
106187 106137

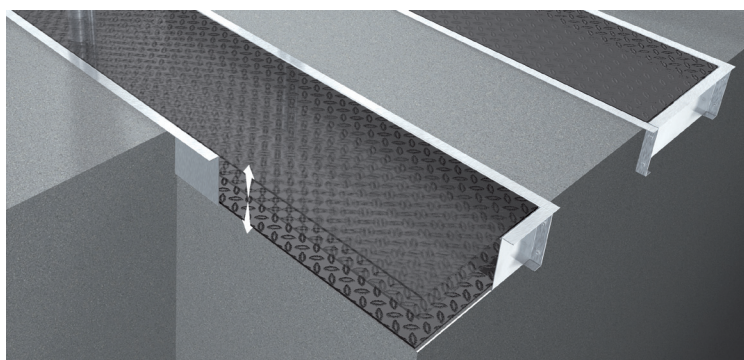

Automatic floor levelling system

2-piston 4400 mm 102366	2-piston DUPLO 4400 mm 102363	4-piston 4800 mm 105178
2-piston 4800 mm 102428	2-piston DUPLO 4800 mm 102365	4-piston 5500 mm 102392

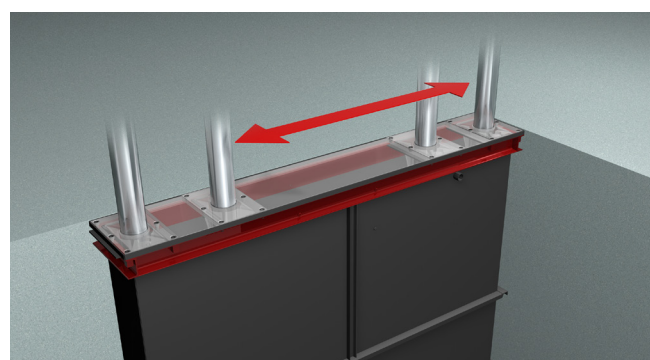

Future Proof installation cassette

Steel 2285 mm, drilling patterns 2285/1785/1335
2150XX
Steel galvanized 2285 mm, 2285/1785/1335
2151XX



Herrmann AG
Bahnhofstrasse 32
D-93483 Pöding

Sales

Phone: +49 (0)9461/91388 50
Fax: +49 (0)9461/91388 55
E-Mail: sales@herrmann.de

Service

Phone: +49 (0)9461/91388 30
Fax: +49 (0)9461/91388 33
E-Mail: service@herrmann.de

www.herrmann.de