

DEVICE BENEFITS




VARIETY OF HEIGHTS 4100 mm, 4400 mm,
4600 mm AND 4800 mm



NEW 2 STAGE ARMS



**NEW 3 STAGE ARMS
(ACCESSORIES)**

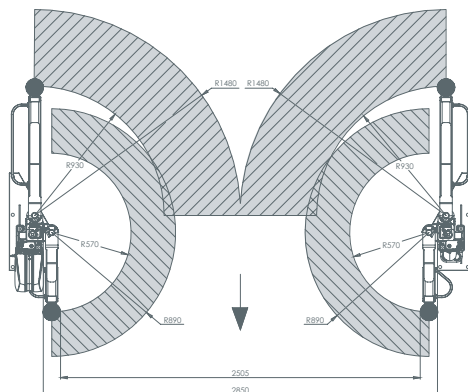

- **LOADING CAPACITY 4000 kg**
- **ASYMMETRIC DESIGN**
- **HYDRAULIC DRIVE HIGHLY EFFICIENT AND ECONOMICAL**
- **ERGONOMIC POWER PACK COVER**
- **MAXIMUM HEIGHT OF ARMS 2005 mm**

- HEIGHT LIMIT CONTROL SWITCH TO PROTECT THE CAR
- VARIETY OF HEIGHTS 4100 mm, 4400 mm, 4600 mm AND 4800 mm
- SET OF TRUCK ADAPTORS 50 mm AND 100 mm
- EASY OPERATION

- CZECH MADE
- LIFTS ARE DESIGNED AND MANUFACTURED IN ACCORDANCE WITH ČSN EN 1493:2010

Personal cars and commercial vehicles



Loading capacity
[kg]

4000

Maximum clearance height [mm]

3950/4280
4480/4680

Clearance width
[mm]

2505

**Maximum height
of arm [mm]**

2005


**Minimum height
of arm [mm]**

90

Motor
[kW]

2.2



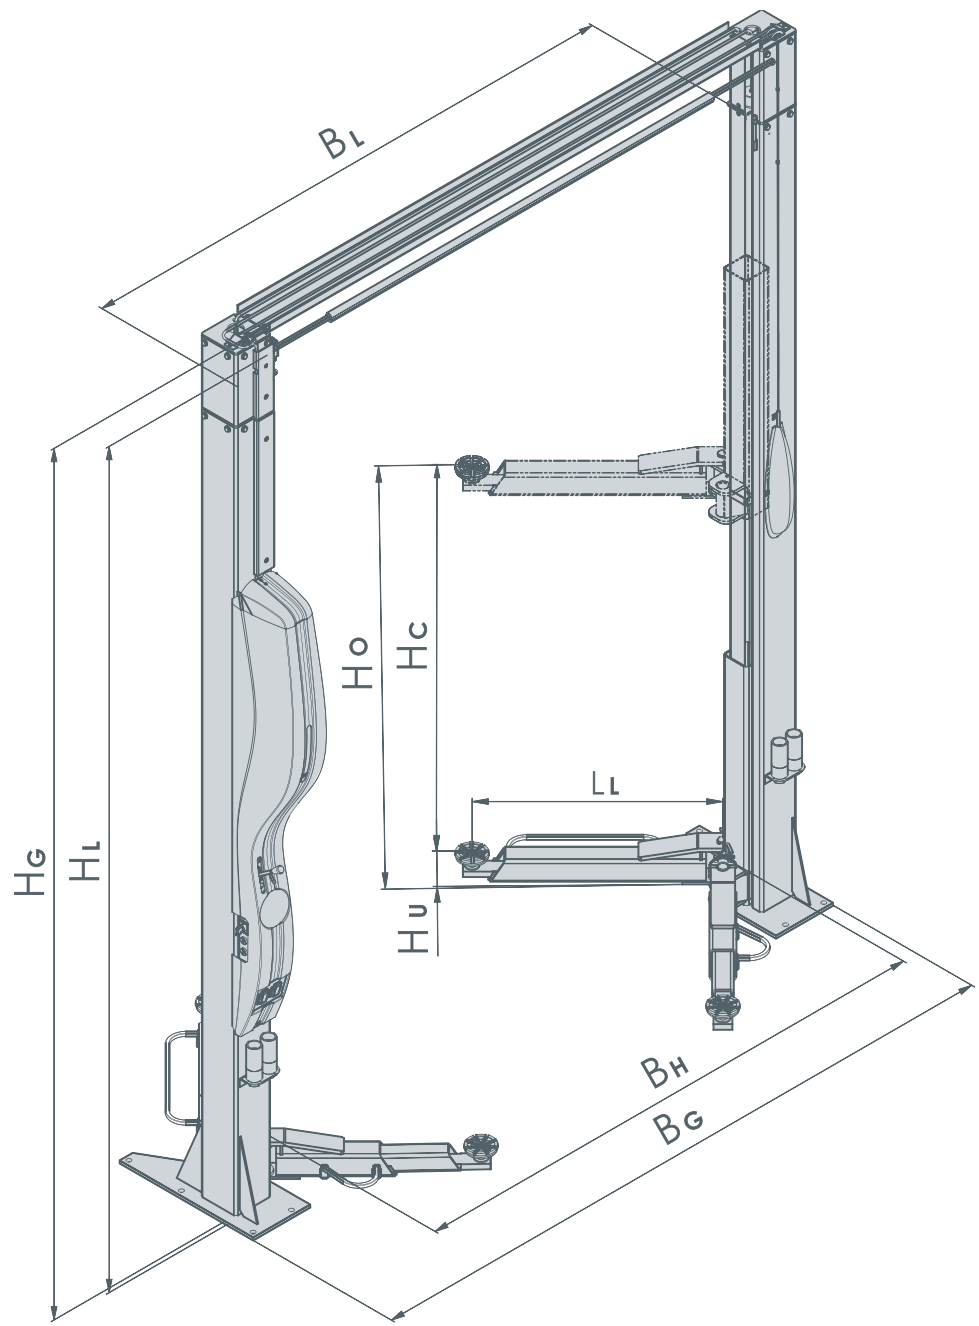

	AMI 3,0 ECO LINE	AMI 3,6 CLASSIC* AMI 4,0 VARIANT	AMI 4,0 PREMIUM
Maximum loading capacity	3000 kg	3600 kg*/4000 kg	4000 kg
Maximum lifting time	32 s	41 s	45 s
Minimum lowering time	21 s	24 s	26 s
Power system	TN-S 3/N/PE 400/230V AC, 50 Hz		
Motor	2,2 kW		
Maximum height of arm H_0	1901 mm	1870 mm	2005 mm
Minimum height of arm H_0	90 mm	90 mm	90 mm
Maximum clearance height H_L	3650 mm	3550*/3880/4080/ 4280/4530 mm	3950/4280/4480/ 4680 mm
Total height H_G	3740 mm	3670*/4000/4200/ 4400/4650 mm	4100/4400/4600/ 4800 mm
Maximum clear distance of posts B_L	2565 mm	2565 mm	2850 mm
Maximum clearance width B_H	2220 mm	2220 mm	2505 mm
Total width B_G	3035 mm	3035 mm	3320 mm
Extension of short arm L_K	570 mm - 890 mm	570 mm - 890 mm	570 - 890 mm
Extension of long arm L_L	930 mm - 1480 mm	930 mm - 1480 mm	930 - 1480 mm
Thickness of slab	160 mm	200 mm	200 mm

- *no extension possibility
- right to make technical changes reserved

2 stage arms (short / long)



Application:

AMI 3,0 ECO LINE
AMI 3,6 CLASSIC
AMI 4,0 VARIANT
AMI 4,0 PREMIUM

3 stage arms



Application:

AMI 3,0 ECO LINE
AMI 3,6 CLASSIC
AMI 4,0 VARIANT
AMI 4,0 PREMIUM


EB-4 with integrated socket 3Ph/400/16



Application:

AMI 3,0 ECO LINE
AMI 3,6 CLASSIC
AMI 4,0 VARIANT
AMI 4,0 PREMIUM

Adjustable pads

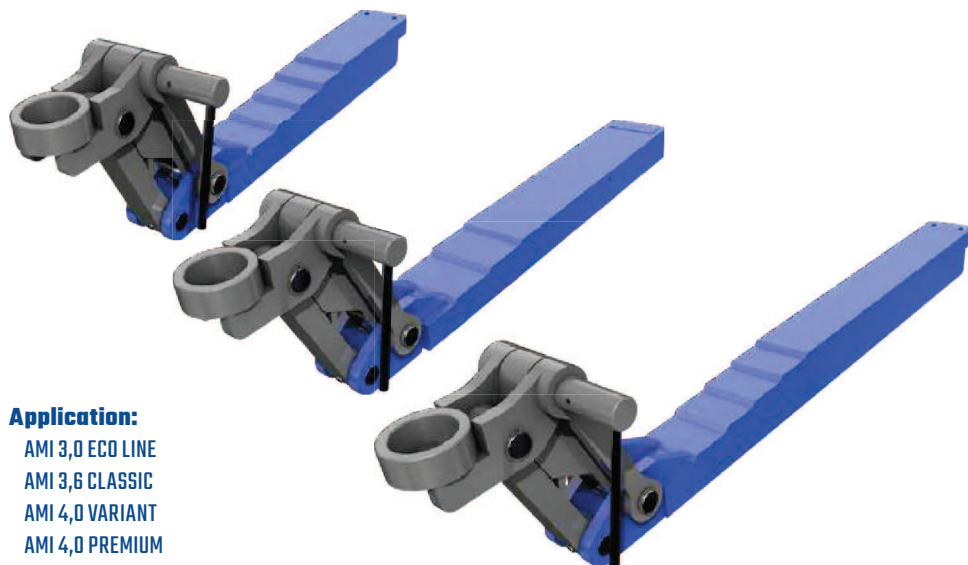

Application:

AMI 3,0 ECO LINE
AMI 3,6 CLASSIC
AMI 4,0 VARIANT
AMI 4,0 PREMIUM

Button operation control



Application:

AMI 3,6 CLASSIC
AMI 4,0 VARIANT
AMI 4,0 PREMIUM



MODEL CONFIGURATIONS

ASYMMETRIC LIFTS